




NOCTURN MD

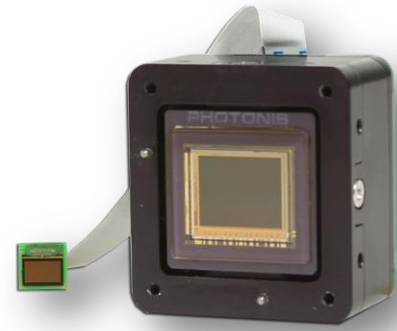


Features

- Ideal for 24/7 operations
- Less than 4e-read-out noise
- 860 nm and 1064 nm laser line detection
- 1.3 Mpx
- 60 fps
- Digital zoom up to 8x

Camera	Specifications
Resolution	1280 x 1024 Pixels
Pixel Pitch	9.7 μm x 9.7 μm
Well Capacity	> 25000 e-
Dynamic Range	> 60 dB
Read Noise	< 4e- median at 60 Hz
Quantum Efficiency	> 80% at 650 nm
Frame Rate	Adjustable up to 60 Hz
Image Lag	< 0.1%
Shutter Mode	Rolling
Display	
Display Type	High resolution monochrome (black/white) OLED micro display
Resolution Modes	1746 x 1000 or 1280 x 1000 Pixels
Pixel Pitch	5 μm x 5 μm
Maximum Luminance	250 cd/m ² , 75 fL
Frame Rate	60 Hz

Features	
Imaging Start Up Time	< 5 sec
Image Correction	Bad pixel replacement and 2 points non-uniformity correction (NUC)
Gain Control	Automatic gain and exposure control or manual
On-Screen Display	Full on-screen display capability with text, standard geometrical shapes and graphics
Digital Zoom	Up to 8X (0.001 increment resolution)
Contrast Enhancement	Contrast stretching, equalization and adaptive equalization

Quantum Efficiency Curve shows > 80% at peak with micro lenses

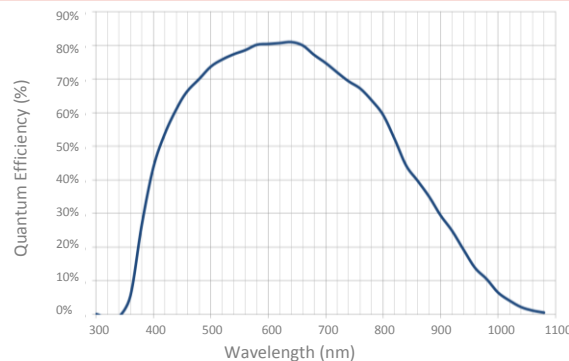

Contact us at digitalvision@photonis.com




PHOTONIS
Digital Vision

The Information provided in this document is believed to be accurate and reliable but it is not guaranteed as such and is subject to change without notice. No liability is assumed for its use. Performance data represents typical characteristics as individual product performance may vary. Customers should ensure that they have up-to-date Photonis product information before placing orders. Text and pictures are not contractually binding. Photonis makes no representations or warranties as to the application of Photonis products. This document may not be reproduced, in whole or in part without the prior written consent of Photonis.



Housing	
Dimensions (excluding connectors) (Width x Height x Depth)	34.1 mm x 36.6 mm x 25 mm
Weight	< 50 g
Display Connection	Commercial flex cable
Input/Output	
Analog Video Output	User-selectable NTSC/PAL
Communications	Industry-standard USB 2.0 Full Speed USB 2.0 Mass Storage for SD Card Support
User Interface	Logic level RS-232 serial port
Snapshots	On-board capture of *,JPG or *, PGM (8/10b)
Environmental and Power	
Operating Temperature	-40°C to +60°C
Storage Temperature	-50°C to +80°C
Input Voltage	USB powered or external +2.6 to +12 VDC
Power (typical)	1.8 W

Mechanical Dimensions for MD Camera Body (in mm)

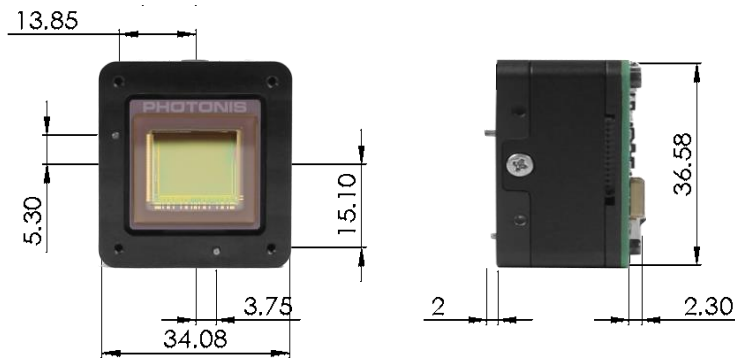

NOCTURN MD Camera is powered by the LYNX CMOS imaging sensor, optimized for low light level imaging.

This fully solid-state CMOS sensor provides excellent imaging across varying light conditions, from daylight to low-light levels such as those found during a quarter moon.

The LYNX CMOS imaging sensor provides full SXGA resolution at 100 frames per second, with < 4e- read out noise and without cooling.



LYNX

Contact us at digitalvision@photonis.com



PHOTONIS
Digital Vision

The information provided in this document is believed to be accurate and reliable but it is not guaranteed as such and is subject to change without notice. No liability is assumed for its use. Performance data represents typical characteristics as individual product performance may vary. Customers should ensure that they have up-to-date Photonis product information before placing orders. Text and pictures are not contractually binding. Photonis makes no representations or warranties as to the application of Photonis products. This document may not be reproduced, in whole or in part without the prior written consent of Photonis.